DP IB Maths: AA HL

1.10 Systems of Linear Equations

Contents

- 1.10.1 Systems of Linear Equations
- 1.10.2 Algebraic Solutions

1.10.1 Systems of Linear Equations

Introduction to Systems of Linear Equations

What are systems of linear equations?

- A linear equation is an equation of the first order (**degree 1**)
  - This means that the **maximum degree** of each term is 1
  - These are examples of linear equations:
    - $2x + 3y = 5$ & $5x - y = 10 + 5z$
  - These are examples of non-linear equations:
    - $x^2 + 5x + 3 = 0$ & $3x + 2xy - 5y = 0$
    - The terms x^2 and xy have degree 2
- A system of linear equations is where **two or more linear equations** involve the **same variables**
  - These are also called **simultaneous equations**
- If there are ***n* variables** then you will need **at least *n* equations** in order to solve it
  - For your exam n will be 2 or 3
- A **2×2 system** of linear equations can be written as
  - $$a_1x + b_1y = c_1$$
    $$a_2x + b_2y = c_2$$
- A **3×3 system** of linear equations can be written as
  - $$a_1x + b_1y + c_1z = d_1$$
    $$a_2x + b_2y + c_2z = d_2$$
    $$a_3x + b_3y + c_3z = d_3$$

What do systems of linear equations represent?

- The most common application of systems of linear equations is in **geometry**
- For a **2×2** system
  - Each equation will represent a **straight line in 2D**
  - The solution (if it exists and is unique) will correspond to the **coordinates** of the point where the **two lines intersect**
- For a **3×3** system
  - Each equation will represent a **plane in 3D**
  - The solution (if it exists and is unique) will correspond to the **coordinates** of the point where the **three planes intersect**

Systems of Linear Equations

How do I set up a system of linear equations?

- Not all questions will have the equations written out for you
- There will be **bits of information** given about the variables
  - **Two bits** of information for a **2×2 system**
  - **Three bits** of information for a **3×3 system**
  - Look out for clues such as 'assuming a linear relationship'
- Choose to assign ***x*, *y* & *z*** to the given variables
  - This will be helpful if using a GDC to solve
- Or you can choose to use more meaningful variables if you prefer
  - Such as *c* for the number of cats and *d* for the number of dogs

How do I use my GDC to solve a system of linear equations?

- You can use your **GDC to solve** the system on the **calculator papers (paper 2 & paper 3)**
- Your GDC will have a function within the algebra menu to solve a system of linear equations
- You will need to choose the number of equations
  - For two equations the variables will be *x* and *y*
  - For three equations the variables will be *x*, *y* and *z*
- If required, write the equations in the given form
  - $ax + by = c$
  - $ax + by + cz = d$
- Your GDC will display the values of *x* and *y* (or *x*, *y*, and *z*)

Examiner Tip


- Make sure that you are familiar with how to use your GDC to solve a system of linear equations because even if you are asked to use an algebraic method and show your working, you can use your GDC to check your final answer
- If a systems of linear equations question is asked on a non-calculator paper, make sure you check your final answer by inputting the values into all original equations to ensure that they satisfy the equations

Worked example

On a mobile phone game, a player can purchase one of three power-ups (fire, ice, electricity) using their points.

- Adam buys 5 fire, 3 ice and 2 electricity power-ups costing a total of 1275 points.
- Alice buys 2 fire, 1 ice and 7 electricity power-ups costing a total of 1795 points.
- Alex buys 1 fire and 1 ice power-ups which in total costs 5 points less than a single electricity power up.

Find the cost of each power-up.

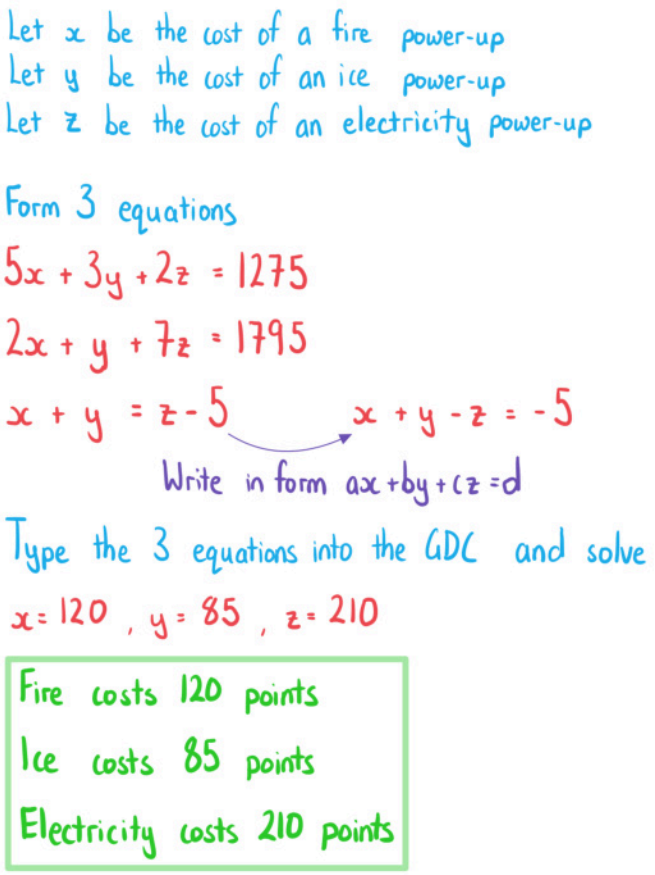

1.10.2 Algebraic Solutions

Row Reduction

How can I write a system of linear equations?

- To save space we can just write the **coefficients without the variables**
- For 2 variables: $\begin{aligned} a_1x + b_1y &= c_1 \\ a_2x + b_2y &= c_2 \end{aligned}$ can be written shorthand as $\left[\begin{array}{cc|c} a_1 & b_1 & c_1 \\ a_2 & b_2 & c_2 \end{array}\right]$
- For 3 variables: $\begin{aligned} a_1x + b_1y + c_1z &= d_1 \\ a_2x + b_2y + c_2z &= d_2 \\ a_3x + b_3y + c_3z &= d_3 \end{aligned}$ can be written shorthand as $\left[\begin{array}{ccc|c} a_1 & b_1 & c_1 & d_1 \\ a_2 & b_2 & c_2 & d_2 \\ a_3 & b_3 & c_3 & d_3 \end{array}\right]$

What is a row reduced system of linear equations?

- A system of linear equations is in row reduced form if it is written as:
  - $\left[\begin{array}{ccc|c} A_1 & B_1 & C_1 & D_1 \\ 0 & B_2 & C_2 & D_2 \\ 0 & 0 & C_3 & D_3 \end{array}\right]$ which corresponds to $\begin{aligned} A_1x + B_1y + C_1z &= D_1 \\ B_2y + C_2z &= D_2 \\ C_3z &= D_3 \end{aligned}$
    - It is very helpful if the values of A_1, B_2, C_3 are **equal to 1**

What are row operations?

- **Row operations** are used to make the linear equations **simpler to solve**
  - They **do not affect the solution**
- You can **switch any two rows**
  - $\left[\begin{array}{ccc|c} a_1 & b_1 & c_1 & d_1 \\ a_2 & b_2 & c_2 & d_2 \\ a_3 & b_3 & c_3 & d_3 \end{array}\right]$ can be written as $\left[\begin{array}{ccc|c} a_3 & b_3 & c_3 & d_3 \\ a_2 & b_2 & c_2 & d_2 \\ a_1 & b_1 & c_1 & d_1 \end{array}\right]$ using $r_1 \leftrightarrow r_3$
    - This is useful for getting zeros to the bottom
    - Or getting a one to the top
- You can **multiply any row by a (non-zero) constant**

- $\left[\begin{array}{ccc|c} a_1 & b_1 & c_1 & d_1 \\ a_2 & b_2 & c_2 & d_2 \\ a_3 & b_3 & c_3 & d_3 \end{array}\right]$ can be written as $\left[\begin{array}{ccc|c} a_1 & b_1 & c_1 & d_1 \\ ka_2 & kb_2 & kc_2 & kd_2 \\ a_3 & b_3 & c_3 & d_3 \end{array}\right]$ using $k \times r_2 \to r_2$
  - This is useful for getting a 1 as the first non-zero value in a row
- You can **add multiples of a row to another row**
  - $\left[\begin{array}{ccc|c} a_1 & b_1 & c_1 & d_1 \\ a_2 & b_2 & c_2 & d_2 \\ a_3 & b_3 & c_3 & d_3 \end{array}\right]$ can be written as $\left[\begin{array}{ccc|c} a_1 & b_1 & c_1 & d_1 \\ a_2+5a_3 & b_2+5b_3 & c_2+5c_3 & d_2+5d_3 \\ a_3 & b_3 & c_3 & d_3 \end{array}\right]$ using $r_2 + 5r_3 \to r_2$
    - This is useful for creating zeros under a 1

How can I row reduce a system of linear equations?

- **STEP 1**: Get a **1 in the top left corner**
  - You can do this by **dividing the row** by the current value in its place
  - If the current value is 0 or an awkward number then you can **swap rows first**
    - $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ * & * & * & * \\ * & * & * & * \end{array}\right]$
- **STEP 2**: Get **0's in the entries below the 1**
  - You can do this by **adding/subtracting a multiple of the first row** to each row
    - $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & * & * & * \\ 0 & * & * & * \end{array}\right]$
- **STEP 3**: **Ignore the first row and column** as they are now complete
  - **Repeat STEPS 1 – 2** to the remaining section
    - Get a 1: $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & 1 & C_2 & D_2 \\ 0 & * & * & * \end{array}\right]$
    - Then 0 underneath: $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & 1 & C_2 & D_2 \\ 0 & 0 & * & * \end{array}\right]$
- **STEP 4**: Get a **1 in the third row**
  - Using the same idea as **STEP 1**
    - $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & 1 & C_2 & D_2 \\ 0 & 0 & 1 & D_3 \end{array}\right]$

How do I solve a system of linear equations once it is in row reduced form?

- Once you row reduced the equations you can then **convert back to the variables**
  - $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & 1 & C_2 & D_2 \\ 0 & 0 & 1 & D_3 \end{array}\right]$ corresponds to $\begin{aligned} x + B_1 y + C_1 z &= D_1 \\ y + C_2 z &= D_2 \\ z &= D_3 \end{aligned}$
- Solve the equations **starting at the bottom**
  - You have the value for z from the third equation
  - Substitute z into the second equation and solve for y
  - Substitute z and y into the first each and solve for x

Examiner Tip

- To reduce the number of operations you do whilst solving a system of operations, you can do a couple of things:
  - You can set up your original matrix with the equations in any order, so if one of the equations already has a 1 in the top left corner, put that one first
  - You do not need to make every equation so that it only has a single variable with a value of 1, you just need to do that for 1 of the equations and use that result to work out the others

Worked example

Solve the following system of linear equations using algebra.

$$2x-3y+4z=14$$
$$x+2y-2z=-2$$
$$3x-y-2z=10$$

Write without the variables

$$\left[\begin{array}{ccc|c} 2 & -3 & 4 & 14 \\ 1 & 2 & -2 & -2 \\ 3 & -1 & -2 & 10 \end{array}\right]$$

Swap rows to get 1 in top left corner

$$\left[\begin{array}{ccc|c} 1 & 2 & -2 & -2 \\ 2 & -3 & 4 & 14 \\ 3 & -1 & -2 & 10 \end{array}\right] \quad R_1 \leftrightarrow R_2$$

Add multiples of R_1 to R_2 and R_3 to get zeros under the 1

$$\left[\begin{array}{ccc|c} 1 & 2 & -2 & -2 \\ 0 & -7 & 8 & 18 \\ 0 & -7 & 4 & 16 \end{array}\right] \begin{array}{l} R_2 - 2R_1 \to R_2 \\ R_3 - 3R_1 \to R_3 \end{array}$$

Multiple the second row to get a 1

$$\left[\begin{array}{ccc|c} 1 & 2 & -2 & -2 \\ 0 & 1 & -\frac{8}{7} & -\frac{18}{7} \\ 0 & -7 & 4 & 16 \end{array}\right] \quad R_2 \times -\frac{1}{7} \to R_2$$

Repeat the steps

$$\left[\begin{array}{ccc|c} 1 & 2 & -2 & -2 \\ 0 & 1 & -\frac{8}{7} & -\frac{18}{7} \\ 0 & 0 & -4 & -2 \end{array}\right] \quad R_3 + 7R_2 \to R_3$$

$$\left[\begin{array}{ccc|c} 1 & 2 & -2 & -2 \\ 0 & 1 & -\frac{8}{7} & -\frac{18}{7} \\ 0 & 0 & 1 & \frac{1}{2} \end{array}\right] \quad R_3 \times -\frac{1}{4} \to R_3$$

Write out the equations starting at the bottom

$z = \frac{1}{2}$

$y - \frac{8}{7}z = -\frac{18}{7} \Rightarrow y - \frac{4}{7} = -\frac{18}{7} \Rightarrow y = -\frac{14}{7} = -2$

$x + 2y - 2z = -2 \Rightarrow x - 4 - 1 = -2 \Rightarrow x = 3$

$x = 3, \quad y = -2, \quad z = \frac{1}{2}$

Number of Solutions to a System

How many solutions can a system of linear equations have?

- There could be
  - 1 **unique solution**
  - **No solutions**
  - An **infinite number** of solutions
- You can determine the case by looking at the row reduced form

How do I know if the system of linear equations has no solutions?

- Systems with **no solutions** are called **inconsistent**
- When trying to solve the system after using the row reduction method you will end up with a **mathematical statement which is never true**:
  - Such as: 0 = 1
- The **row reduced system will contain**:
  - **At least one row** where the entries to the **left of the line are zero** and the entry on the **right of the line is non-zero**
    - Such a row is called **inconsistent**
  - For example:
    - Row 2 is inconsistent $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & 0 & 0 & D_2 \\ 0 & 0 & 1 & D_3 \end{array}\right]$ if D_2 is non-zero

How do I know if the system of linear equations has an infinite number of solutions?

- Systems with **at least one solution** are called **consistent**
  - The solution could be unique or there could be an infinite number of solutions
- When trying to solve the system after using the row reduction method you will end up with a **mathematical statement which is always true**
  - Such as: 0 = 0
- The **row reduced system will contain**:
  - **At least one row** where **all the entries are zero**
  - **No inconsistent rows**
  - For example:
    - $\left[\begin{array}{ccc|c} 1 & B_1 & C_1 & D_1 \\ 0 & 1 & C_2 & D_2 \\ 0 & 0 & 0 & 0 \end{array}\right]$

How do I find the general solution of a dependent system?

- A **dependent system** of linear equations is one where there are **infinite number of solutions**

- The general solution will depend on **one or two parameters**
- In the case where **two rows are zero**
  - Let the **variables corresponding** to the **zero rows** be equal to the **parameters** λ & μ
    - For example: If the first and second rows are zero rows then let $x = \lambda$ & $y = \mu$
  - Find the **third** variable in terms of the two parameters using the equation from the third row
    - For example: $z = 4\lambda - 5\mu + 6$
- In the case where **only one row is zero**
  - Let the **variable corresponding** to the **zero row** be equal to the **parameter** λ
    - For example: If the first row is a zero row then let $x = \lambda$
  - Find the **remaining two variables in terms of the parameter** using the equations formed by the other two rows
    - For example: $y = 3\lambda - 5$ & $z = 7 - 2\lambda$

Examiner Tip

- Common questions that pop up in an IB exam include questions with equations of lines
- Being able to recognise whether there are no solutions, 1 solution or infinite solutions is really useful for identifying if lines are coincident, skew or intersect!

Worked example

$$x+2y-z=3$$
$$3x+7y+z=4$$
$$x-9z=k$$

a) Given that the system of linear equations has an infinite number of equations, find the value of k.

Write without the variables $\left[\begin{array}{ccc|c} 1 & 2 & -1 & 3 \\ 3 & 7 & 1 & 4 \\ 1 & 0 & -9 & k \end{array}\right]$

Use the row reduction method

$\left[\begin{array}{ccc|c} 1 & 2 & -1 & 3 \\ 0 & 1 & 4 & -5 \\ 0 & -2 & -8 & k-3 \end{array}\right]$ $r_2 - 3r_1 \to r_2$, $r_3 - r_1 \to r_3$ $\left[\begin{array}{ccc|c} 1 & 2 & -1 & 3 \\ 0 & 1 & 4 & -5 \\ 0 & 0 & 0 & k-13 \end{array}\right]$ $r_3 + 2r_2 \to r_3$

There are an infinite number of solutions if a row is zero

$k - 13 = 0$

$\boxed{k = 13}$

b) Find a general solution to the system.

The third row is zero so let the third variable (z) equal a parameter

$z = \lambda$

Use equations to find expressions for the other variables

$y + 4z = -5 \Rightarrow y + 4\lambda = -5 \Rightarrow y = -4\lambda - 5$

$x + 2y - 1 = 3 \Rightarrow x - 8\lambda - 10 - \lambda = 3 \Rightarrow x = 9\lambda + 13$

$\boxed{x = 9\lambda + 13,\ y = -4\lambda - 5,\ z = \lambda \text{ for } \lambda \in \mathbb{R}}$